

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/101748 A1

- (51) International Patent Classification⁷: **B41M 5/025**, 5/03, B41F 17/00, B44C 1/17
- (74) Agent: **DONNE, Eddy**; Bureau M.F.J. Bockstael nv., Arenbergstraat 13, B-2000 Antwerpen (BE).
- (21) International Application Number: **PCT/BE03/00072**
- (81) Designated States (*national*): BR, CA, CN, IL, JP, US.
- (22) International Filing Date: **24 April 2003 (24.04.2003)**
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
2002/0359 31 May 2002 (31.05.2002) BE
- (71) Applicant (*for all designated States except US*): **TECHNI-COAT INTERNATIONAL, NAAMLOZE VENNOOTSCHAP** [BE/BE]; Franse weg 31, B-2920 Kalmthout (BE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **LAFAILLE, Marc, Maria, Leo, Jan** [BE/BE]; Asterlaan 5, B-2950 Kappellen (BE).
- Declarations under Rule 4.17:**
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations BR, CA, CN, IL, JP, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)*
 - *of inventorship (Rule 4.17(iv)) for US only*
- Published:**
- *with international search report*
 - *with amended claims*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND DEVICE FOR PRINTING OBJECTS

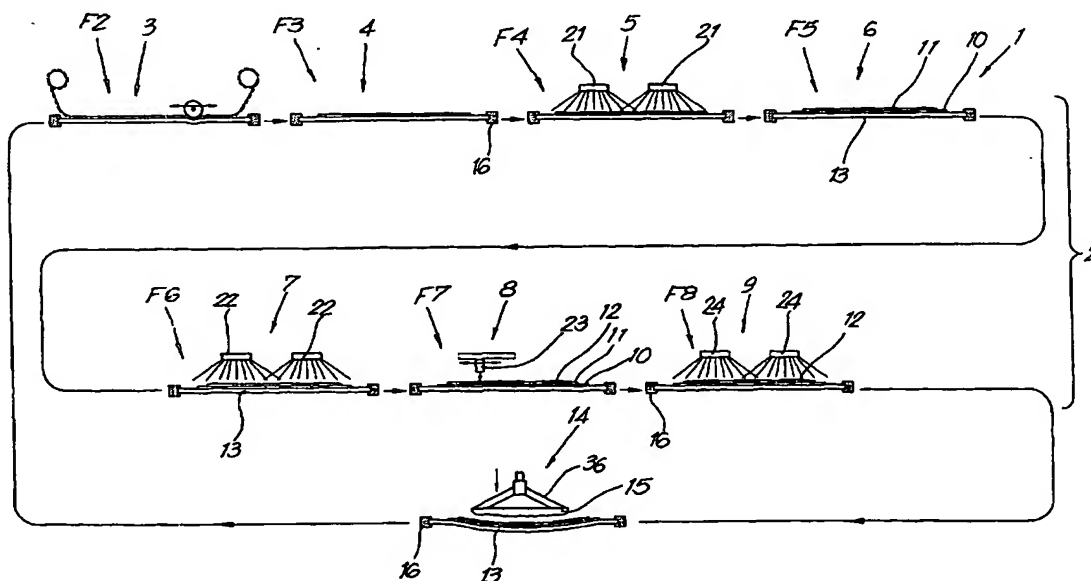

(57) Abstract: Method for printing objects, whereby these objects (15) are provided with a multi-layered print, characterized in that to this aim, on one hand, two or more layers of printing medium (10-11-12), which at least partially are situated one above the other, are provided on a supple carrier (13) and, on the other hand, these layers (10-11-12) are simultaneously transferred onto the object (15) to be printed by bringing said carrier (13), together with the layers of printing medium (10-11-12) present thereon, and the object (15) into mutual contact.

METHOD AND DEVICE FOR PRINTING OBJECTS

5 This invention relates to a method and device for printing objects.

10 In first instance, it is intended for printing three-dimensional surfaces, for example, the surface of irregularly formed objects, however, in general it can be applied for printing a variety of surfaces, thus, for example, flat surfaces, too.

15 A practical application intended by the invention is to provide a decorative coating on the housing of portable telephone devices, in particular on the front side of cellular phones.

20 A technique for printing such objects is known from the Belgian patent No. 1.012.584. According to this known technique, printing ink is provided on a supple carrier, and subsequently this printing ink is transferred onto the object by bringing the object and the carrier into mutual contact, whereby the carrier is forced to follow the form of the surface of the object to be printed.

25 When several layers must be printed one above the other, said technique may be repeatedly applied for each of these layers. However, applying successive layers in this manner has various disadvantages.

30 A first disadvantage consists in that repeatedly printing one and the same object is a complicated and time-consuming technique.

35 A second disadvantage consists in that a possible interaction between two successive layers of printing

medium, in case such interaction is desired, is almost excluded, as, when the layers are provided on the object one after the other, a drying already will take place in between.

5

A third disadvantage consists in that it is very difficult to provide the different prints in mutual respect right on top of each other, which is particularly important when working with patterns which must be coordinated in respect to each other. Due to the fact that the supple carriers may act somewhat differently with each printing cycle, it can be prevented that an undesired shifting between the patterns of the successive printings does occur.

15

The present invention aims at a method for printing objects which allows that a multi-layered print can be provided on these objects in an efficient manner, said method allowing that one or more of the aforementioned disadvantages can be excluded.

20

To this aim, the invention, in the first place, relates to a method for printing objects, whereby these objects are provided with a multi-layered print, with as a characteristic that to this aim, on one hand, two or more layers of printing medium, which are situated at least partially one above the other, are provided on a supple carrier and, on the other hand, these layers are simultaneously transferred to the object to be printed, by bringing said carrier, together with the layers of printing medium present thereon, and the object into mutual contact.

25

30

As the aforementioned layers of printing medium are provided on the carrier one above the other, the advantage is created that the object can be provided with

35

a multi-layered print by means of a single printing cycle, which results in a considerable saving of time.

5 As the layers of printing medium can be provided on the carrier relatively short after one another, it is easy to provide for an interaction of the printing media.

10 In consideration of the fact that the layers of printing medium are simultaneously provided on the object, a possible mutual shifting of printing patterns as a result of deformations occurring during the transfer of said layers to the object is completely excluded.

15 According to a preferred characteristic of the invention, in between the application of two or more layers of printing medium, and possibly after applying the last layer of printing medium, one or more of said layers are subjected to a curing treatment, more particularly a drying process. Depending on the purpose, this may be a
20 complete curing or drying, as well as a partial curing or drying.

By a complete curing, more particularly, drying, it can be effected that the different layers of printing medium
25 do not influence each other.

By a partial curing, more particularly, drying, different effects can be intended. A first aim consists in that the layer of printing medium which is cured, dried,
30 respectively, is rendered less sensitive to dust particles. Dust particles actually will adhere less, the drier the respective layer of printing medium is. Thereby, the risk is reduced that, when realizing the method, dust particles end up in the print.

35

By a partial curing, the different layers, by choosing a

suitable degree of curing, can be optimally conditioned in function of the treatments which have to be performed further therewith, for example, in function of the adherence which has to be realized with the subsequent
5 layer of printing medium, and/or in function of the adherence to be realized with the object.

Said curing may be a drying, obtained by evaporation of volatile components, as well as so-called curing as a
10 result of chemical reaction. Preferably, for the curing use will be made of an exposure to ultraviolet radiation or of heating, this latter, for example, by means of an infrared radiation.

15 In the case that at least two successive layers of printing medium are subjected to a curing treatment, the curing, according to a preferred form of embodiment, shall take place in a selective manner, and such that, when curing the second layer, little or no further curing
20 of the first layer takes place. This has as an advantage that both layers can be partially cured, independently from each other.

Such curing in a selective manner preferably is performed
25 by using layers of printing medium which cure by radiation, for example, by means of ultraviolet light, however, at different wavelengths of the radiation, and/or by using layers of printing medium which necessitate a different kind of treatment for their
30 curing, for example, on one hand, a treatment by means of a radiation with ultraviolet light and, on the other hand, a treatment by means of infrared light.

According to a particular aspect of the invention, the
35 carrier, previous to the application of the layers of printing medium, is cleaned, which can be realized in a

practical manner by bringing the carrier into contact with an element which is provided with a self-adhesive layer, and subsequently removing said element from the carrier, such that contaminations possibly present on the carrier will remain at the self-adhesive layer.

For realizing the printing, a variety of printing media can be applied. In practical applications, however, two or more layers of printing medium, chosen from the following series, will be used: a top layer in the form of a transparent varnish, a primer or basic layer, and an ink.

Hereby, for the top layer preferably a varnish is used which can be cured by means of radiation with ultraviolet light or such. For the primer, preferably a printing medium is used having the features that it has a good adherence to synthetic material and that it absorbs printing ink. For the ink, preferably a water-based kind of ink is used.

It is noted that the application of at least two layers of printing medium, whereby the one printing medium is chosen such that it becomes at least partially absorbed in the other printing medium, forms a particularly advantageous fact for realizing certain prints. This technique anyway allows to realize the absorbing printing medium such that it shows optimum characteristics for providing for an adherence to the underlying material, whereas the absorbed printing medium then can be chosen such that optimal illustrations and/or colours are realized.

Providing the different layers of printing medium on the carrier can be performed in any suitable manner. An advantage of the invention consists in that different

manners can be combined, in other words, that successive layers can be provided on the carrier by means of different techniques. Preferably, however, use shall be made of one or more of the following techniques: by means
5 of screen-print, by a printer, by tampon printing.

Preferably, the method is realized by means of a flat carrier in the form of a membrane. The application of a flat carrier has as an advantage that it can easily be
10 positioned and consequently each layer of printing medium can be applied on the right place. Such flat carrier also offers the advantage that, as long as it is kept in flat condition, always retains the same shape, such that the possible mutual coordination of different patterns
15 exclusively depends on positioning the carrier, and such that other influences are excluded.

In the most preferred form of embodiment, use shall be made of carriers which are moved, by means of a closed
20 circuit, along different processing stations and an actual printing device, wherein the respective layers of printing medium successively are provided on the carriers, these layers possibly are subjected to drying and finally, in said printing device, are simultaneously
25 transferred onto the object to be printed. Thereby, a production in series can be provided in an efficient manner.

Of course, the invention also relates to devices for
30 realizing the aforementioned method. These devices substantially are characterized in that they at least consist of, on one hand, means, more particularly processing stations, for successively providing two or more layers of printing medium on a supple carrier, and,
35 on the other hand, an actual printing device, where said layers are transferred onto the object to be printed, by

bringing said carrier, together with the layers of printing medium present thereon, and the object in mutual contact. For the processing stations, amongst others, processing stations can be used where printing medium is applied on the carrier by means of screen-print, printing or tampon printing; processing stations where an at least partial curing or drying of already applied layers of printing medium takes place; and processing stations where a cleaning of the carrier is performed.

According to a preferred form of embodiment, the device comprises several carriers, which successively are brought into the different processing stations and the actual printing device. By using several carriers, the advantage is created that different treatments simultaneously can be carried out on the respective carriers and that the actual printing treatments can be performed shortly one after the other, without each time having to wait until one carrier has been run through a full cycle.

Still more particularly, it is preferred that said carriers are taken up in one and the same transport device, such that, after each treatment, they are simultaneously moved to a successive processing station, the printing device, respectively. In a practical form of embodiment, to this aim use will be made of a rotatable table on which the different carriers are provided and whereby the aforementioned processing stations and the actual printing device are installed along the periphery of this table.

According to a preferred form of embodiment, the device is provided with exchangeable carriers, more particularly carriers which are attached in holders, preferably in the form of a membrane attached to a frame, whereby these

holders, together with the carriers attached thereto, are mounted in the device in a replaceable manner.

Moreover, the invention also relates to a printing device
5 for printing objects, of the type whereby printing medium
is transferred onto an object by bringing a carrier,
provided in a holder and being provided with printing
medium, into contact with the object, such that the
10 printing medium is transferred from the carrier onto the
object, with as a characteristic that the printing device
comprises means which grip, more particularly, clamp, the
carrier within the circumference determined by the
location where the carrier is connected to the holder.
Amongst others, this has the advantage that the
15 attachment of the carrier at the holder, during the
realization of the actual printing process, whereby, as
known, tensile loads are created in the carrier, remains
unloaded.

20 Further, the invention also relates to a printing device
for printing objects, of the type whereby printing medium
is transferred onto an object by bringing a carrier,
which is provided with printing medium, into contact with
an object, such that the printing medium is transferred
25 from the carrier onto the object, characterized in that
the printing device comprises a chamber-shaped part which
is open at one side, whereby the open side thereof can be
sealed by a carrier presented in the printing device,
such that the chamber-shaped part forms a chamber in
30 which a pressure can be created having the purpose of
assisting in pressing the carrier around the object.

The use of such chamber-shaped part which is brought into
contact with a carrier presented thereto, has as an
35 advantage that carriers of any kind can be presented to
the printing device, and that such carrier can be

provided with printing medium beforehand, at another location, in other words, that the printing medium must not be applied on the carrier in the actual printing device.

5

The aforementioned printing devices, in other words, the printing devices which, as aforementioned, comprise means for clamping a carrier, as well as the printing devices which, as aforementioned, comprise an open chamber-shaped part in which a pressure can be created, are particularly suited for being applied in a device which, as aforementioned, also comprises different processing stations and whereby carriers successively can be presented to these processing stations and the printing device. However, according to the invention, these printing devices also can be applied separately, thus, without having to form a part of a circuit consisting of processing stations and a printing device.

10

15

20

With the intention of better showing the characteristics of the invention, hereafter, as an example without any limitative character, a preferred form of embodiment of the invention is described, with reference to the accompanying drawings, wherein:

25

Figure 1 schematically represents an application in which the method according to the invention is applied;

figures 2 to 9 schematically, at a larger scale, represent views of the parts indicated by arrows F2 to F9 in figure 1;

30

figure 10 schematically represents a practical form of embodiment of the device according to the invention;

35

figures 11 and 12, for two different conditions, and for a practical form of embodiment, represent a

cross-section according to line IX-IX in figure 10.

As represented, the device 1 from figure 1 substantially consists of, on one hand, means 2, more particularly
5 processing stations 3 to 9, for successively providing two or more layers of printing medium, in this case, three layers, 10-11-12, respectively, on a supple carrier 13, and, on the other hand, an actual printing device 14 where said layers 10-11-12 are transferred to an object
10 15 to be printed by bringing the carrier 13, together with the layers 10-11-12 present thereon, and the object 15 into mutual contact.

As is better shown in figures 2 to 9, the carrier 13 is
15 realized as a flat membrane which, in the represented example, is attached in a holder 16. To this aim, preferably a silicone mat is used, for example, with a thickness of 1 to 3 mm, and preferably 2 mm.

20 In the processing station 3, the carrier 13 is cleaned. As represented schematically in figure 2, this is preferably performed by bringing the carrier 13 into temporary contact with an element 17 which, at its underside, is provided with a self-adhesive layer, such
25 that, when the element 17 is removed again, all dust particles present on the carrier 13 are taken up by the self-adhesive layer.

In the represented example, the element 17 consists of a
30 film or such which, with a self-adhesive layer present at the underside thereof, is pressed on the carrier 13 for a short time by moving a pressing element 18, more particularly a pressing roller, thereover. After having cleaned the carrier 13 in this manner, said carrier is
35 moved to the next processing station 4. The self-adhesive film can consist of a band which can be moved between two

rollers 19-20, whereby, for example, after each cleaning cycle, this band is moved on over a length L, such that, with a subsequent cleaning cycle, a clean self-adhesive layer is available.

5

As represented in figure 3, in the processing station 4 the first layer of printing medium 10 is applied on the carrier 13. In the represented example, this is a top layer of transparent varnish, more particularly varnish of the type which can be cured by means of an exposure to ultraviolet light. The application of this top layer on the carrier 13 can be realized in any manner, for example, by providing it on the carrier 13 by means of screen-print, by spraying it on the carrier 13, by providing it on the carrier 13 by means of a roll, etc.

15

In the processing station 5, a partial curing of the layer of printing medium 10 is taking place. Hereby, the carrier 13, with the layer 10 present thereon, as represented in figure 4, is brought under one or more sources 21 of ultraviolet radiation. Amongst others, this partial curing has the purpose to provide for minimizing the risk that dust particles possibly floating around might get stuck in the layer of printing medium 10. Also, the layer 10, by the partial curing, is conditioned such that it shows optimum characteristics for receiving the subsequent layers thereon.

20

25

In the processing station 6, the second layer of printing medium 11, as represented in figure 5, is provided on the first layer of printing medium 10. In the represented example, the layer 11 consists of a primer or basic layer which is chosen such that it has the features of adhering well to the material, for example, synthetic material, of which the object consists, as well as it is suited to absorb the printing ink applied in a next stage.

30

35

The application of the layer 11 can also be performed in any manner whatsoever. Preferably, however, to this aim also one of the aforementioned techniques will be applied.

5

As represented in figure 6, in the processing station 7 also a partial curing takes place by radiation by means of, for example, ultraviolet radiation sources 22. In order to prevent that the top layer, in other words, the layer 10, hereby cures further, a selective curing is applied. Hereby, it is intended that in the processing station 7, a treatment of such kind is performed that solely the layer 11 is subjected to a curing, whereas no or almost no further curing of said layer 10 takes place. Practically, this is, for example, realized by choosing printing media for the layers 10 and 11 which cure at different radiation frequencies in the ultraviolet range. By then applying ultraviolet light or such of a well-defined frequency, a selective processing can be performed.

20

In the processing station 8, the third layer 12 is applied, which, in the represented example, consists of a printed pattern. In a particularly practical form of embodiment, the application thereof, as represented in figure 7, shall take place by means of a printing head 23 of a printer, said printing head moving over the carrier 13 and printing, for example, an image in one or more colours on the layer 11.

30

For realizing the layer 12, use can be made of water-based printing inks. The printing medium of which the layer 12 is formed, in other words, the printing ink, hereby at least partially penetrates into the underlying layer 11.

35

Subsequently, in the processing station 9 a further curing, more particularly drying, takes place, in this case, by heating, for example, as represented in figure 8, by radiating with infrared light originating from infrared lamps 24, with as a result that the water from the water-based ink evaporates from the layer 12, as a consequence of which the pigments of the layer 12 become fixed in the layer 11.

Finally, the carrier 13 is brought into the actual printing device 14, and the object 15 and the carrier 13, as represented in figure 9, are brought into mutual contact, such that the print formed by the layers 10-11-12 is transferred as a whole onto the object 15. In other words, when the object 15 is removed from the carrier 13, the layers of printing medium 10-11-12 remain on the object 15.

It is noted that in figures 1 to 9, the carrier 13 as well as the layers 10-11-12 are represented exaggeratedly thick and that in reality, they are considerably thinner.

After the object 15, which, for example, consists of a front panel of a portable phone device, is printed, it is clear that the layer 10 shall be situated at the outer side. Hereby, this layer 10 forms a hard transparent top layer. Through this layer 10, the layer 11 is visible, as well as the layer 12 absorbed in this layer 11, which layer 12, for example, represents a pattern, inscription or the like.

Although the use of the layers of printing medium 10-11-12 described specifically in the foregoing, according to the invention offers important advantages, it is clear that the invention is not restricted to the specific use of these layers. The invention, however, in general

relates to the fact that two or more layers of printing medium are applied on a carrier and subsequently are simultaneously transferred onto the object.

5 As schematically represented in figure 1, the device 1 comprises several carriers 13, which successively are brought into the different processing stations 3 to 9 and the printing device 14, such that, each time the carriers 13 are placed into a subsequent processing station, also
10 a carrier 13 is brought into the printing device 14 and a printing cycle can be performed.

As schematically represented in figure 10 in a top plan view, the carriers 13 to this aim preferably are provided
15 in a rotatable table 25, whereby said processing stations 3 to 9, as well as the printing device 14, are installed along the periphery of this table 25. When the carriers 13, immediately after performing the printing, can be re-used, they can remain present in the device 1, such that
20 they automatically end up in the processing station 3. When the carriers 13, however, are not immediately reusable, for example, as a result of the presence of a surplus of printing medium thereupon, these carriers, for example, can be removed in stations 26, whereas new
25 and/or cleaned carriers 13 are provided in the table 25 in the station 27. It is also possible to provide a cleaning device at the location of station 26 and/or 27 in order to remove surplus printing medium.

30 Although the carriers 13 can be fixed in the table 25 in different ways, preferably, as schematically represented in figure 11, use is made of carriers 13 attached to a holder 16, whereby the holders 16, together with the carriers 13 attached thereto, are mounted in openings 28
35 in the table 25, more particularly are retained at their edges in seats 29 by clamping means 30.

In a schematic manner, figures 11 and 12 represent how the printing device 14 preferably is composed.

5 This printing device 14 is provided with means 31 for moving the objects 15 to be printed and the carrier 13 in mutual respect and to bring them into mutual contact; means 32 for gripping, more particularly, clamping, the carrier 13 within the circumference which is determined by the location where the carrier 13 is connected to the
10 holder 16; and a chamber-shaped part 34 which is open at one side 33, whereby the open side 33 thereof can be sealed by the carrier 13, such that, by means of a compressed air connection 35, a pressure can be created in the chamber.

15

The means 31 consist of a holder 36 at which the objects 15 are fixed, and a drive 37 for moving this holder, such that the objects 15 are pressed against the carrier 13.

20 The means 32 are formed by, on one hand, the upper edge 38 of the part 34 and, on the other hand, a pressing part 39 situated at the other side of the carrier 13, as well as by drives 40 and 41 which allow to move the part 34 and the pressing part 39 towards each other, such that
25 the carrier 13 is clamped in between them.

In the part 34, counter moulds 42 can be installed.

30 The printing device 14 functions as described in the following. In rest position, the printing device 14 is in a condition as represented in figure 11. When the carrier 13 with the layers of printing medium 10-11-12 present thereupon is situated between the part 34 and the pressing part 39, these are moved towards each other,
35 with as a consequence that the carrier 13, as represented in figure 12, is clamped. Subsequently, the objects 15

are pressed against the carrier 13, such by moving these objects 15 downward until the carrier 13 is in contact with the counter moulds 42. Preferably, then a pressure is created in the chamber-shaped part 34 to provide for that
5 the carrier 13 folds around the objects. In this manner, the layers 10-11-12 are simultaneously transferred onto the objects 15.

Finally, the parts of the printing device 14 are brought
10 back into the condition of figure 11, after which a subsequent carrier 13, provided with layers of printing medium 10-11-12, can be presented in the printing device 14. Of course, the printed objects 15 are removed from the holder 36 and new objects 15 to be printed are
15 provided therein, which either can be realized automatically or not.

The present invention is in no way limited to the forms of embodiment described as an example and represented in
20 the figures, however, such method and device for printing objects can be realized according to various variants, without leaving the scope of the claims.

Claims.

- 1.- Method for printing objects, whereby these objects
5 (15) are provided with a multi-layered print,
characterized in that to this aim, on one hand, two or
more layers of printing medium (10-11-12), which at least
partially are situated one above the other, are provided
on a supple carrier (13) and, on the other hand, these
10 layers (10-11-12) are simultaneously transferred onto the
object (15) to be printed by bringing said carrier (13),
together with the layers of printing medium (10-11-12)
present thereon, and the object (15) into mutual contact.
- 15 2.- Method according to claim 1, characterized in that in
between the application of two or more layers of printing
medium (10-11-12), and possibly after the application of
the last layer of printing medium (12), one or more of
said layers (10-11-12) are subjected to a curing
20 treatment, preferably by means of an exposure to
ultraviolet radiation or by means of heating.
- 3.- Method according to claim 2, characterized in that a
partial curing is provided.
- 25 4.- Method according to claim 2 or 3, characterized in
that at least two layers (10-11) are subjected to a
curing treatment and that the curing takes place in a
selective manner, such that, when curing the second layer
30 (11), little or no further curing of the first layer (10)
will take place.
- 5.- Method according to any of the preceding claims,
characterized in that the carrier (13), preceding the
35 application of the layers of printing medium (10-11-12),
is cleaned.

6.- Method according to claim 5, characterized in that the carrier (13) is cleaned by bringing it into contact with an element (17) which is provided with a self-adhesive layer, and subsequently removing this element (17) from the carrier (13), such that contaminations possibly present on the carrier (13) remain at the self-adhesive layer.

7.- Method according to any of the preceding claims, characterized in that the object (15) is printed with two or more layers of printing medium (10-11-12), chosen from the following series: a top layer in the form of a transparent varnish, a primer or basic layer, and an ink.

8.- Method according to any of the preceding claims, characterized in that use is made of at least two layers of printing medium (11-12), whereby the one printing medium (12) is chosen such that it is at least partially absorbed in the other printing medium (11), and whereby this latter printing medium (11), in other words, the absorbing printing medium (11), is chosen such that it provides for a good adherence to the underlying material with which it is or will be in contact.

9.- Method according to any of the preceding claims, characterized in that use is made of a flat carrier (13) in the form of a membrane.

10.- Method according to any of the preceding claims, characterized in that use is made of carriers (13) which, by means of a closed circuit, are moved along different processing stations (3-4-5-6-7-8-9) and an actual printing device (14), in which the respective layers of printing medium (10-11-12) successively are provided on the carriers (13), these layers (10-11-12) possibly are subjected to a drying process, and these layers (10-11-

12) finally, in said printing device (14), simultaneously are transferred onto the object (15) to be printed.

11.- Method according to any of the preceding claims, characterized in that, during the transfer of said layers (10-11-12) onto the object (15), the carrier (13) is brought into contact with means forming a support for the carrier (13) around the object (15) to be printed and, more particularly, provide for a clamping of the carrier (13).

12.- Method according to any of the preceding claims, characterized in that during the transfer of said layers (10-11-12) onto the object (15), the carrier (13) is brought into contact with a chamber-shaped part (34) which is open at one side (33), such that the open side (33) is sealed by the carrier (13) and a chamber is formed in which a pressure can be created with the purpose of assisting in pressing the carrier (13) around the object (15).

13.- Device for printing objects, more particularly according to the method of any of the preceding claims, characterized in that it at least consists of, on one hand, means, more particularly processing stations (3-4-5-6-7-8-9), for successively providing two or more layers of printing medium (10-11-12) on a supple carrier (13), and, on the other hand, an actual printing device (14), where said layers (10-11-12) are transferred onto the object (15) to be printed, by bringing said carrier (13), together with the layers of printing medium (10-11-2) present thereon, and the object (15) into mutual contact.

14.- Device according to claim 12 or 13, characterized in that it comprises a moving, more particularly rotatable, table (25), in which several carriers (13) are or can be

provided, such that, by systematically rotating this table (25), the carriers (13), as aforementioned, end up in the respective processing stations (3-4-5-6-7-8-9) and the actual printing device (14).

5

15.- Printing device for printing objects, of the type whereby printing medium (10-11-12) is transferred onto an object (15) by bringing a carrier (13), provided in a holder (16) and being provided with printing medium (10-11-12), into contact with the object (15), such that the printing medium (10-11-12) is transferred from the carrier (13) onto the object (15), characterized in that the printing device (14) comprises means (32) which grip, more particularly, clamp, the carrier (13) within the circumference determined by the location where the carrier (13) is connected to the holder (16).

16.- Printing device for printing objects, of the type whereby printing medium (10-11-12) is transferred onto an object (15) by bringing a carrier (13), which is provided with printing medium (10-11-12), into contact with the object (15), such that the printing medium (10-11-12) is transferred from the carrier (13) onto the object (15), characterized in that the printing device (14) comprises a chamber-shaped part (34) which is open at one side (33), whereby the open side (33) thereof can be sealed by a carrier (13) presented or present in the printing device (14), such that the chamber-shaped part (34) forms a closed chamber in which a pressure can be created with the purpose of assisting in pressing the carrier (13) around the object (15).

AMENDED CLAIMS

**[Received by the International Bureau on 23 September 2003 (23.09.03)
original claim 1 amended; remaining claims unchanged]**

1. Method for printing objects, whereby these objects (15)
5 are provided with a multi-layered print, characterized
in that to this aim, on one hand, two or more layers of
printing medium (10-11-12), which at least partially are
situated one above the other, are provided on a supple
carrier (13) and, on the other hand, after that at least
10 one of said layers (10-11-12) has been subjected to an
at least partial curing treatment, these layers (10-11-
12) are simultaneously transferred onto the object (15)
to be printed by bringing said carrier (13), together
with the layers of printing medium (10-11-12) present
15 thereon, and the object (15) into mutual contact, and by
removing the object (15) from the carrier (13) after the
transfer of said layers (10-11-12) is completed.










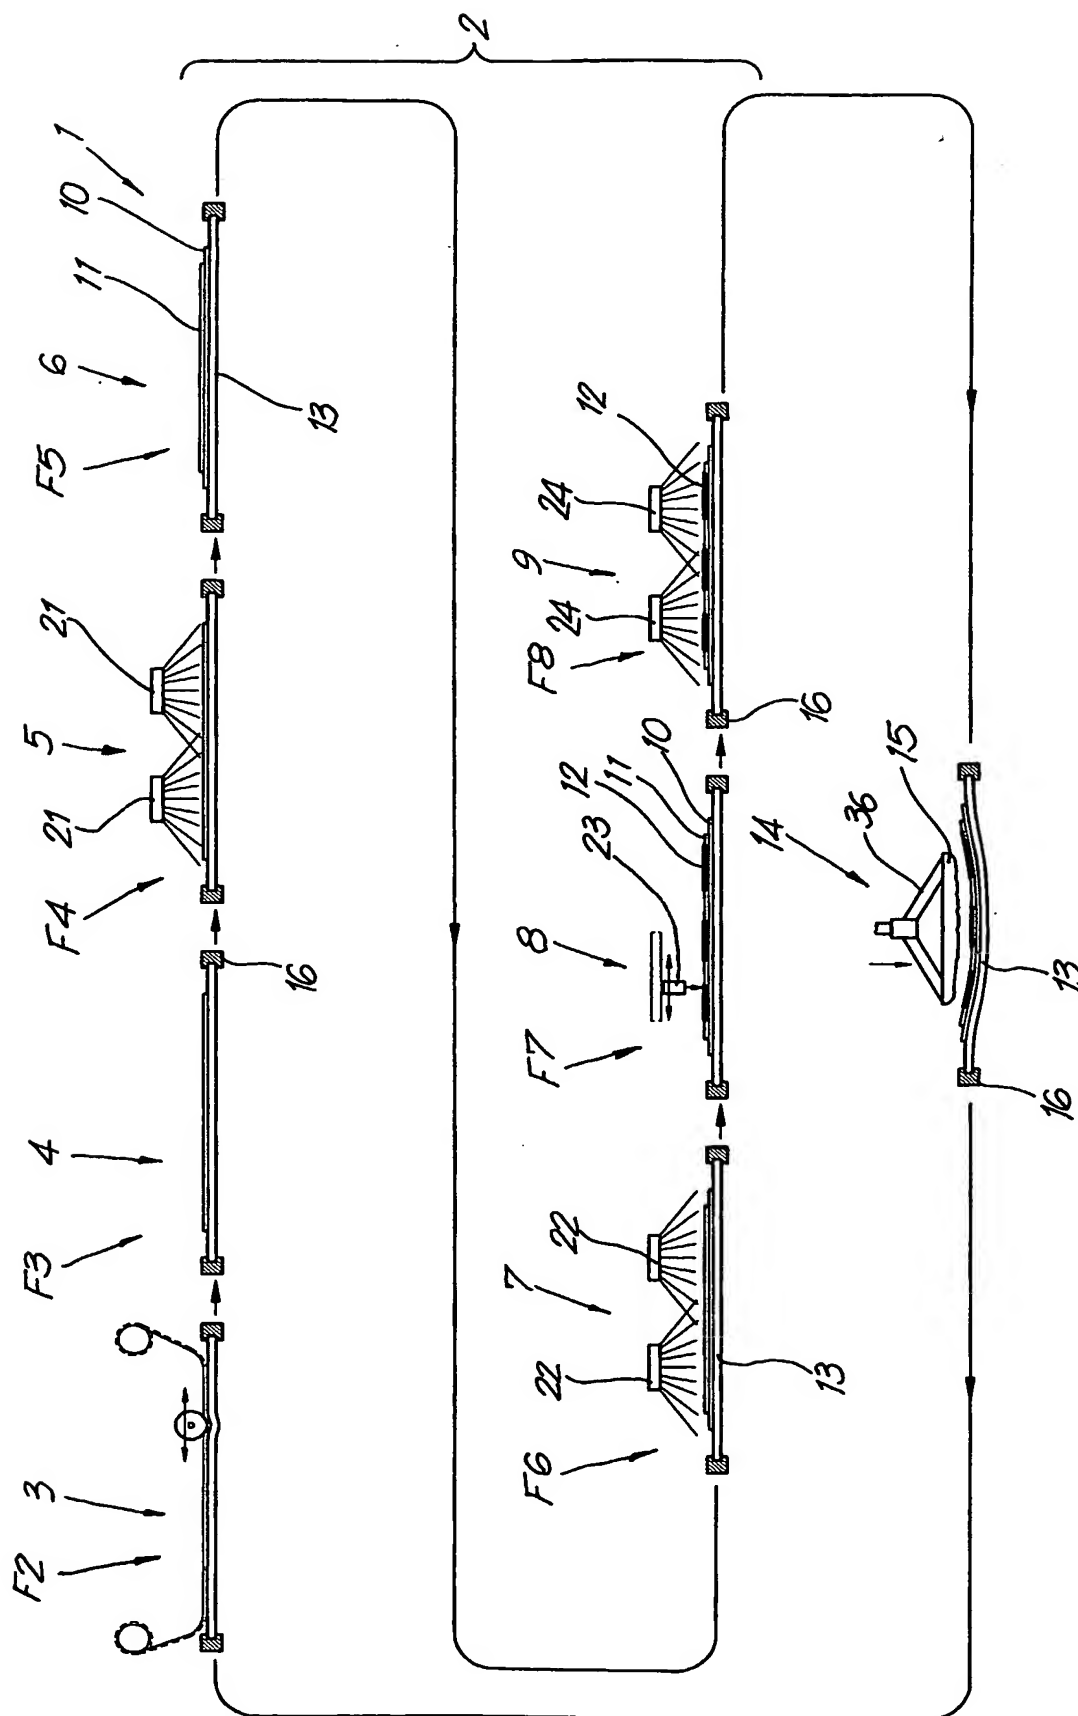


Fig. 1

*Fig. 2**Fig. 3**Fig. 4**Fig. 5*

*Fig. 6**Fig. 7**Fig. 8**Fig. 9*

4/4

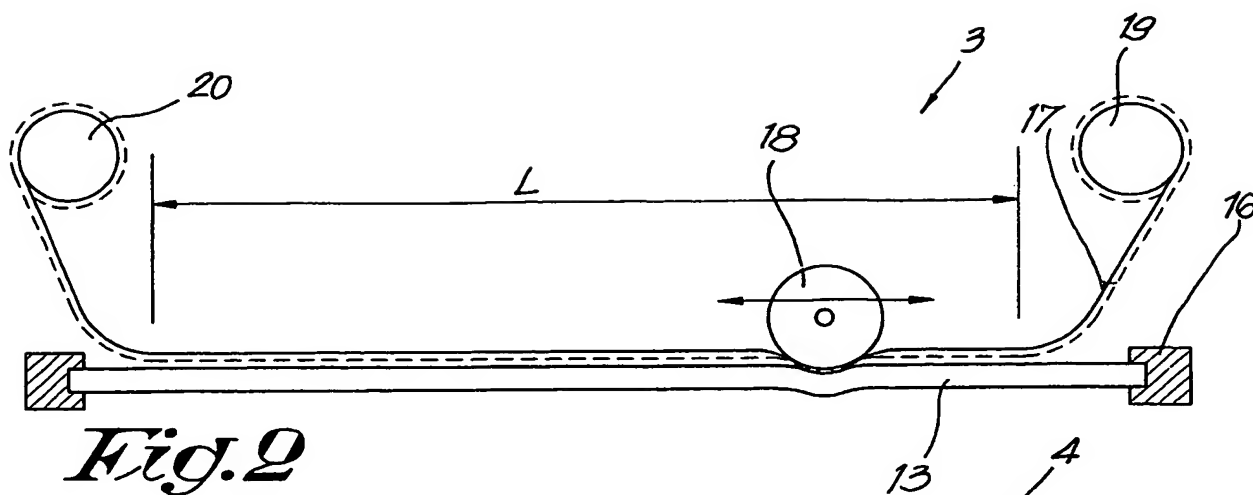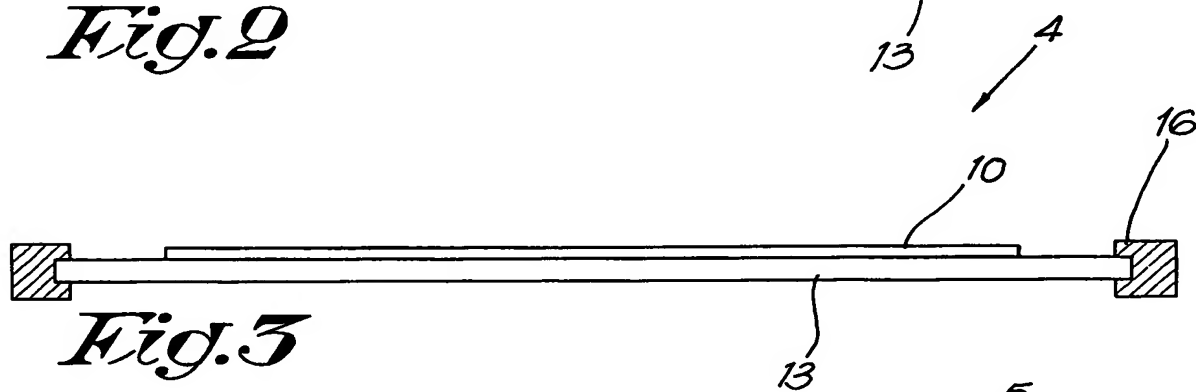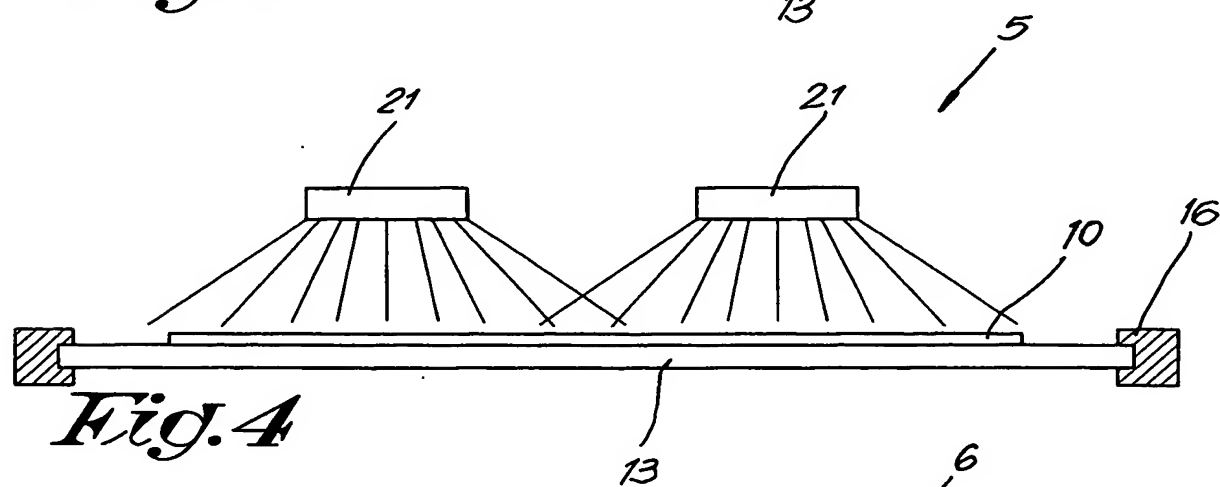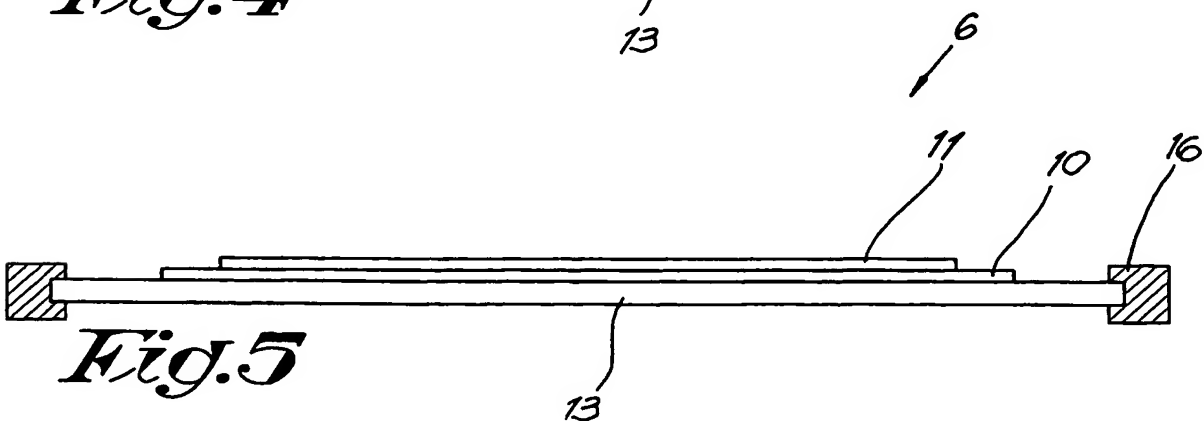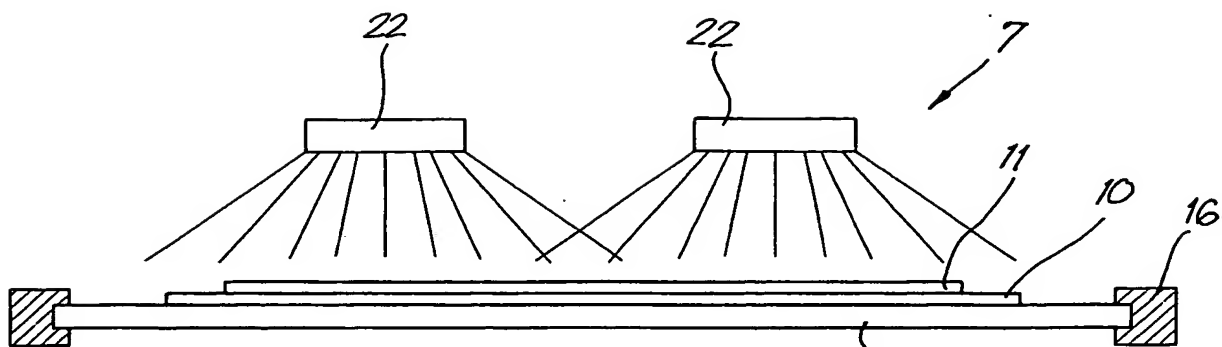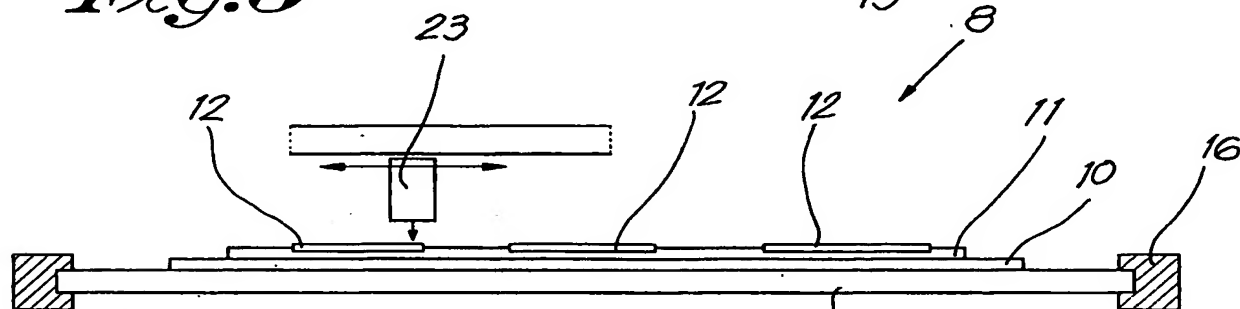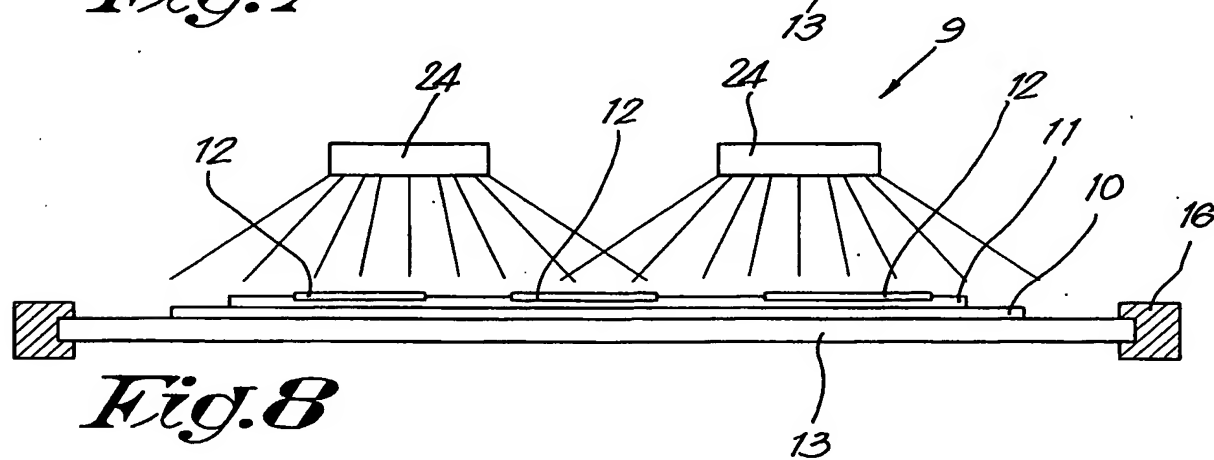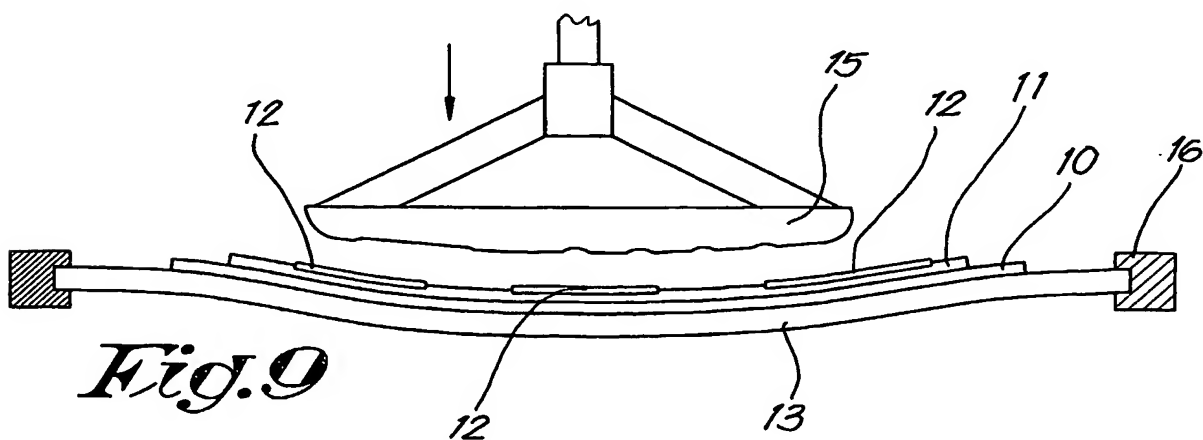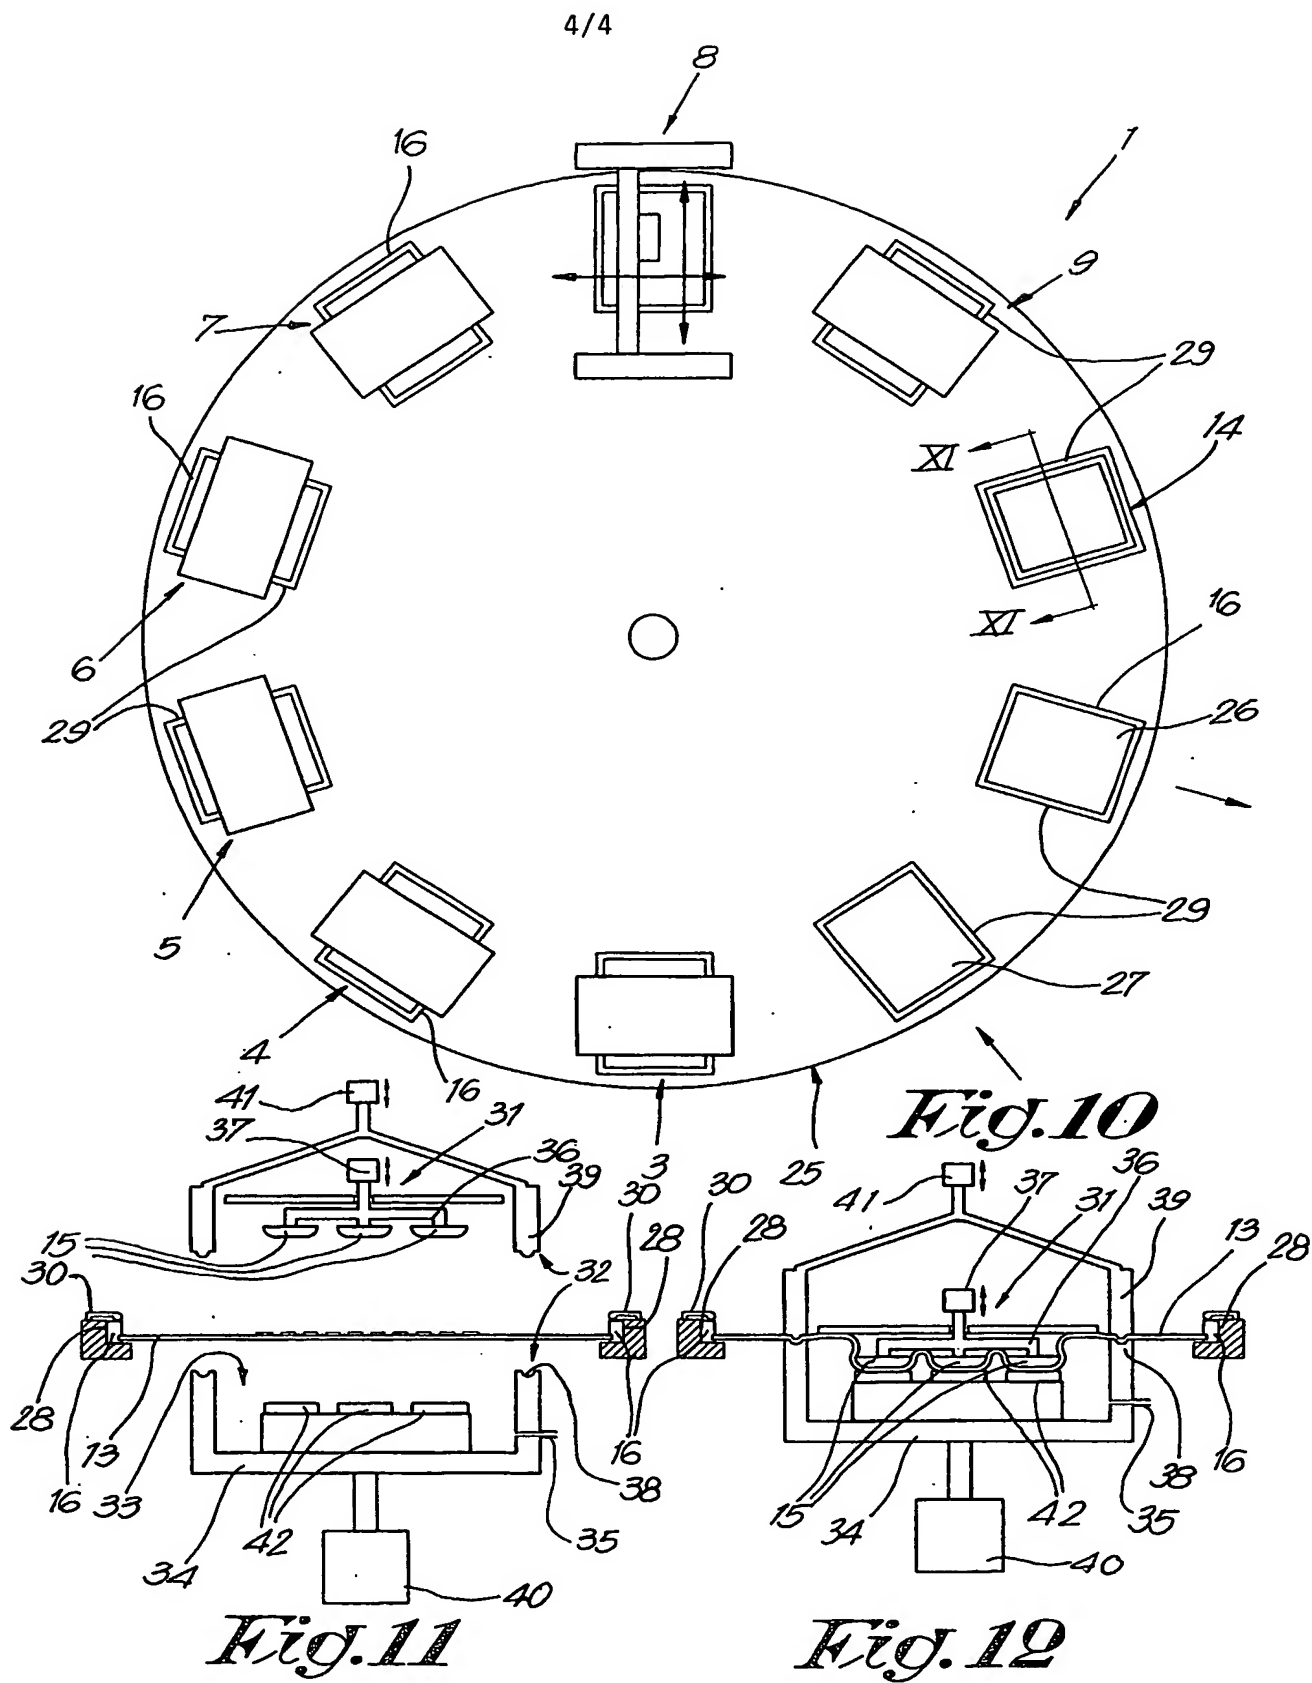

INTERNATIONAL SEARCH REPORT

PCT/BE 03/00072

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B41M5/025 B41M5/03 B41F17/00 B44C1/17

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41M B41F B44C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 61376 A (TECHNI-COAT INTERNATIONAL N.V.) 19 October 2000 (2000-10-19) cited in the application page 1, line 4 - line 6 page 1, line 33 -page 2, line 36 page 4, line 13 - line 23 page 5, line 4 -page 7, line 2 page 8, line 13 - line 17 claims 1,4,5,8,9,12-22; figure 1 ---	1,5,7-16
X	US 5 890 429 A (S.ALAM ET AL.) 6 April 1999 (1999-04-06) claims 1-5; figures 2,3 column 4, line 61 -column 5, line 40 column 2, line 56 -column 3, line 12 --- -/--	1-5,7-12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

16 July 2003

Date of mailing of the international search report

24/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Bacon, A

INTERNATIONAL SEARCH REPORT

PCT/BE 03/00072

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 375 (M-1010), 14 August 1990 (1990-08-14) -& JP 02 137993 A (HONDA MOTOR CO LTD), 28 May 1990 (1990-05-28) abstract -----	1-5,7-10
X	GB 2 079 219 A (LETRASET LIMITED) 20 January 1982 (1982-01-20) page 1, line 34 - line 50 page 1, line 57 - line 64 claim 1; examples 1,2 -----	1,5,7-10

INTERNATIONAL SEARCH REPORT

PCT/BE 03/00072

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0061376	A	19-10-2000	BE 1012584 A3	05-12-2000
			AT 229439 T	15-12-2002
			AU 3545800 A	14-11-2000
			WO 0061376 A1	19-10-2000
			BR 0009605 A	08-01-2002
			CA 2369133 A1	19-10-2000
			CN 1346316 T	24-04-2002
			DE 60000989 D1	23-01-2003
			DK 1173336 T3	31-03-2003
			EP 1173336 A1	23-01-2002
			JP 2002540999 T	03-12-2002
			PT 1173336 T	30-04-2003
<hr/>				
US 5890429	A	06-04-1999	NONE	
<hr/>				
JP 02137993	A	28-05-1990	NONE	
<hr/>				
GB 2079219	A	20-01-1982	NONE	
<hr/>				